

Stainless steel square mesh in stock

The wire mesh was made according to the technical requirements ISO 9044








The materials of the wires for mesh are conforming to the requirements ASTM A580.

Mesh No.	Wire Diameter		Opening Size		Open Area	Roll Width Max
	inch	mm	inch	mm	%	mm
1×1	0.1575	4.000	0.8425	21.400	71.0	2000
2×2	0.0984	2.500	0.4016	10.200	64.5	2000
3×3	0.0787	2.000	0.2546	6.467	58.3	2000
4×4	0.0630	1.600	0.1870	4.750	56.0	2000
4×4	0.0472	1.200	0.2028	5.150	65.8	2000
5×5	0.0394	1.000	0.1606	4.080	64.5	2000
6×6	0.0472	1.200	0.1194	3.033	51.3	2000
6×6	0.0350	0.890	0.1316	3.343	62.4	2000
8×8	0.0280	0.710	0.0970	2.465	60.3	2000
10×10	0.0252	0.640	0.0748	1.900	56.0	2000
10×10	0.0201	0.510	0.0799	2.030	63.9	2000
12×12	0.0230	0.584	0.0603	1.533	52.4	2000
12×12	0.0200	0.508	0.0633	1.609	57.8	2000
14×14	0.0180	0.457	0.0534	1.357	56.0	2000
14×14	0.0200	0.508	0.0514	1.306	51.8	2000
16×16	0.0180	0.457	0.0445	1.131	50.7	2000
18×18	0.0160	0.406	0.0396	1.005	50.7	2000
20×20	0.0197	0.500	0.0303	0.770	36.8	2000
20×20	0.0160	0.406	0.0340	0.864	46.3	2000
24×24	0.0140	0.356	0.0277	0.702	44.0	2000
30×30	0.0177	0.450	0.0156	0.397	21.9	2000
30×30	0.0118	0.300	0.0215	0.547	41.7	2000
30×30	0.0065	0.165	0.0268	0.682	64.8	2000
35×35	0.0177	0.450	0.0109	0.276	14.4	1300
35×35	0.0126	0.320	0.0160	0.406	31.3	2000
35×35	0.0100	0.254	0.0186	0.472	42.3	2000
40×40	0.0100	0.254	0.0150	0.381	36.0	2000
50×50	0.0090	0.229	0.0110	0.279	30.2	2000
50×50	0.0080	0.203	0.0120	0.305	36.0	2000
60×60	0.0075	0.191	0.0091	0.232	30.1	2000
60×60	0.0070	0.178	0.0097	0.245	33.6	2000
70×70	0.0065	0.165	0.0078	0.198	29.7	2000
80×80	0.0055	0.140	0.0070	0.178	31.3	2000
80×80	0.0047	0.120	0.0078	0.198	38.7	2000
90×90	0.0047	0.120	0.0064	0.162	33.0	2000
100×100	0.0045	0.114	0.0055	0.140	30.4	2000
100×100	0.0040	0.102	0.0060	0.152	35.8	2000
100×100	0.0035	0.089	0.0065	0.165	42.2	2000
110×110	0.0040	0.102	0.0051	0.129	31.4	2000
120×120	0.0037	0.094	0.0046	0.118	30.9	2000
150×150	0.0024	0.060	0.0043	0.109	41.7	2000
160×160	0.0021	0.053	0.0042	0.106	44.4	2000
180×180	0.0021	0.053	0.0035	0.088	39.0	2000
200×200	0.0021	0.053	0.0029	0.074	33.7	2000
250×250	0.0016	0.040	0.0024	0.062	36.8	2000
270×270	0.0016	0.040	0.0021	0.054	33.0	2000
300×300	0.0016	0.040	0.0018	0.045	27.8	2000
325×325	0.0014	0.036	0.0017	0.042	29.1	2000
325×325	0.0014	0.036	0.0017	0.043	29.6	2000

DA SHANG WIRE MESH
053600 No.13 Hongqi West Street, Anping,Hebei, China.



400×400	0.0012	0.030	0.0013	0.034	27.8	1600
500×500	0.0010	0.025	0.0010	0.025	25.0	1500
635×635	0.0008	0.020	0.0008	0.020	24.3	1300

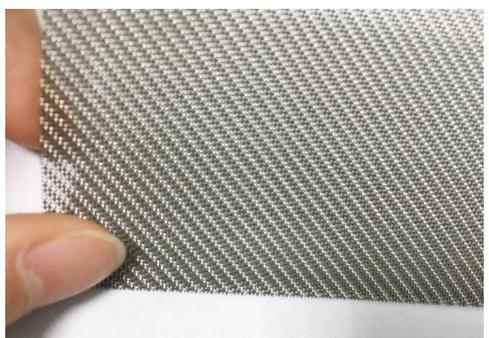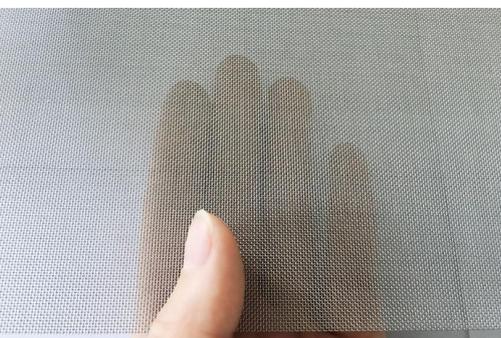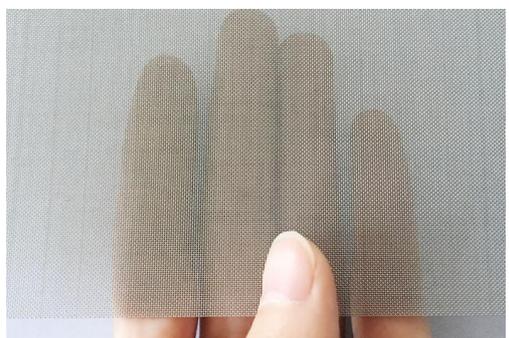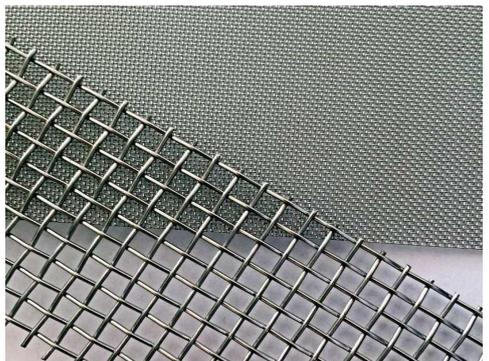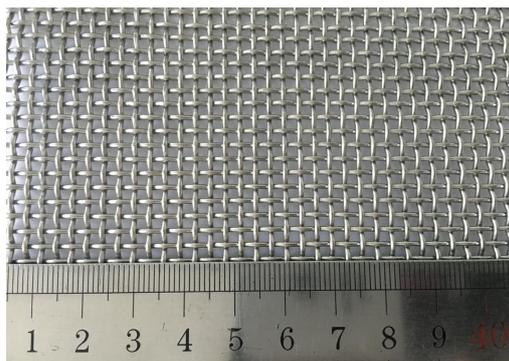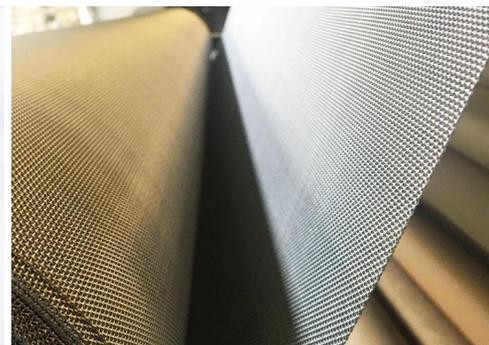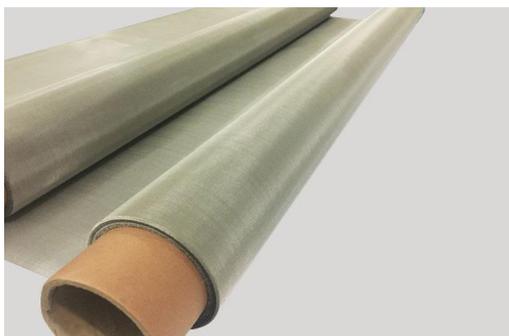

Any interest, please feel free to contact us!
Dashang Wire Mesh
Email: sales@dashangmesh.com
Tel/Fax: 0086 318 7563319/7521333
Pho: 0086 18632807688
Industrial Woven Wire Mesh Solution!

